

ATLAS 7P & 7R Manipulators

Schilling Robotics



Tough and Durable

With seven degrees of freedom and a high lift capacity (250 kg or 550 lb at full extension), the ATLAS gives operators the freedom and strength to perform a wider range of heavy-duty jobs in harsh subsea environments.

Schilling Robotics took the best technological advances in manipulator structure, design, and actuation, and applied them to the ATLAS to accomplish harsh and demanding ROV intervention tasks involving heavy lifting jobs. It has been structurally optimized to withstand prolonged abuse without excess material and weight. It uses similar actuators in all locations, which are made of titanium for high strength, long life, and superior corrosion resistance. Its structure utilizes the optimal strength-to-weight ratio of 6061-T6 aluminum extrusions and billet, ensuring unparalleled durability and toughness.

Specifications

Product	ATLAS 7P and 7R Manipulators
Country of origin	French/ American
Manufacturer	Technip FMC

The subsea industry relies on hundreds of Schilling Robotics' manipulators every day. The ATLAS series of manipulators is suited to work with today's highestperforming vehicles under the most demanding conditions.

Features include

- Extraordinary Lift-to-Weight Ratio
- Low Operating Cost
- Left-Hand and Right-Hand Mounting Configuration Options
- Long Reach and High Degree of Agility Provides a Large Operating Envelope
- Standard Depth Rating of 6,500 msw
- Built for Durability and Reliability in Harsh Subsea Environments
- Available in Position-Controlled or Rate-Controlled Models

Models

The ATLAS is available in both position-controlled and rate-controlled models. Each model can be configured for left-hand or right-hand installations.

Position-Controlled Model

The ATLAS 7P position-controlled model adds joint position sensing (azimuth through wrist) and a servo control valve pack to provide superior telerobotic performance similar to the TITAN 4.

Operation of the manipulator is simple, comfortable, and intuitive with the Schilling Robotics topside controller. The topside controller features a scalemodel pendant arm for controlling the manipulator, as well as function keys for selecting menu options and a display for viewing diagnostic and status information. Advanced operational features are standard, including individual joint freeze, position scaling, password security, programmable stow/deploy routines, individual joint movement limits, incremental gripper movement, individual joint diagnostics, and automatic error checking.

Rate-Controlled Model

A lower-cost alternative than the position-controlled model, the ATLAS 7R is controlled by two hydraulic hoses supplying each joint or function that are operated by customer-supplied valves and switches. The ATLAS 7R requires no electrical connections and is designed for ROVs with onboard hydraulic power interfaces.

With seven functions and a high lift-to-weight ratio, it is a premium option over traditional 5-function grabbers such as the RigMaster, and is particularly effective when paired with a TITAN 4 or ATLAS 7P manipulator

Operating Envelope

A large operating envelope establishes the ATLAS series as a dual-role grabber with the dexterity to access tool skids and supplemental equipment, giving an operator needed flexibility in the field. Additionally, having a slim cross-section allows it to reach into restrictive openings. If it needs to be interchanged between a left and right mounting position, this can be done quickly in the field and without the need for additional parts.

Options and Accessories

The following options and accessories are available for the ATLAS series manipulators:

- 6-in (152 mm) Parallel-Acting Titanium Gripper
- 11.2-in (284 mm) Four-Finger Intermeshing Titanium Gripper
- Spares Kit
- Seal Installation Tool Kit

Specifications

Reach	1.675 m
Type	Position or Rate-Controlled
Functions	7
Materials	Anodized Aluminum, Titanium, Stainless Steel

Arm specifications

Standard depth	1.675 m
Weight in air / water	Position or Rate-Controlled
Lift at full extension	7
Maximum lift, nominal	Anodized Aluminum, Titanium, Stainless Steel
Standard gripper opening	1.675 m
Grip force, nominal	Position or Rate-Controlled
Wrist torque, nominal	7
Wrist rotate, continuous	Anodized Aluminum, Titanium, Stainless Steel


Actuator function

Azimuth	Linear, 120°
Shoulder pitch	Linear, 135°
Elbow pitch	Linear, 135°
Wrist pitch	Linear, 120°
Wrist yaw	Linear, 120°
Wrist rotat	Gerotor, 360°
Gripper, standard	Linear, 198 mm


Hydraulic requirements

Fluid	Mineral, glycol, or synthetic
Viscosity	10-200 cSt
Available flow	5.7 - 19 lpm
Max. pressure	3,000 psi
Max. fluid temperature	54°C
Fluid cleanliness	ISO 4406 14/11


Gripper options

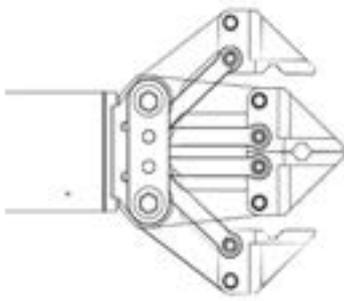


6-in Paralle

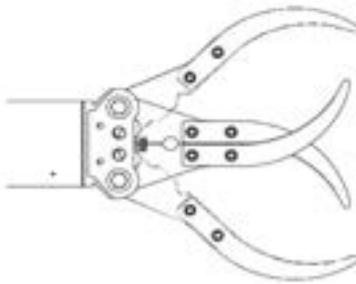


7.8-in Four Finger Intermeshing

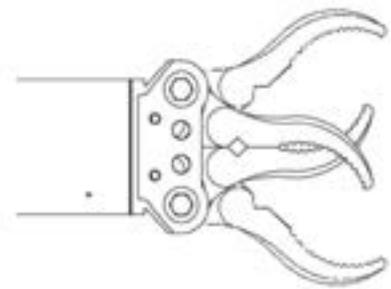


11.2-in Four Finger Intermeshing

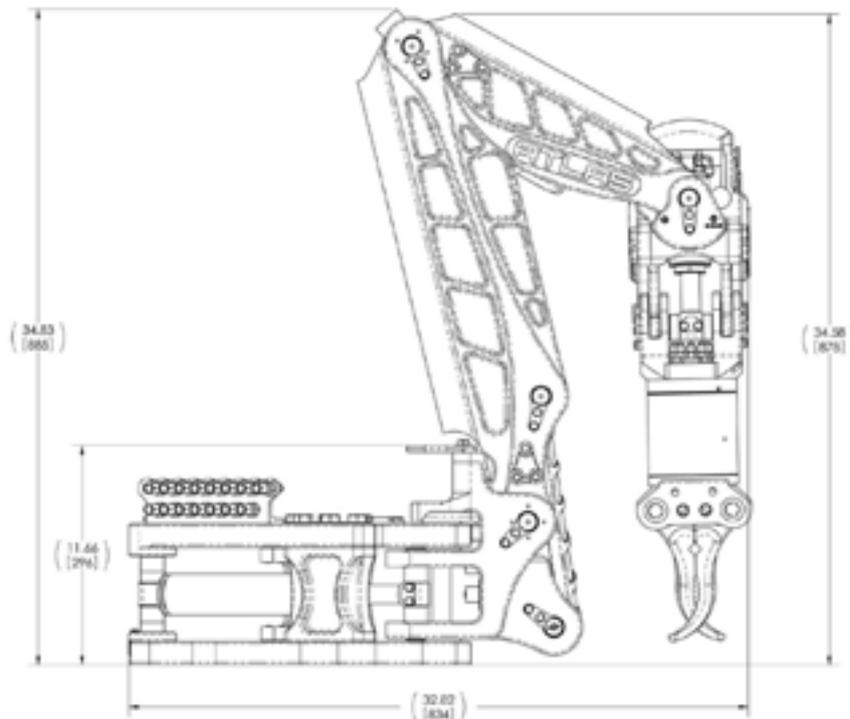

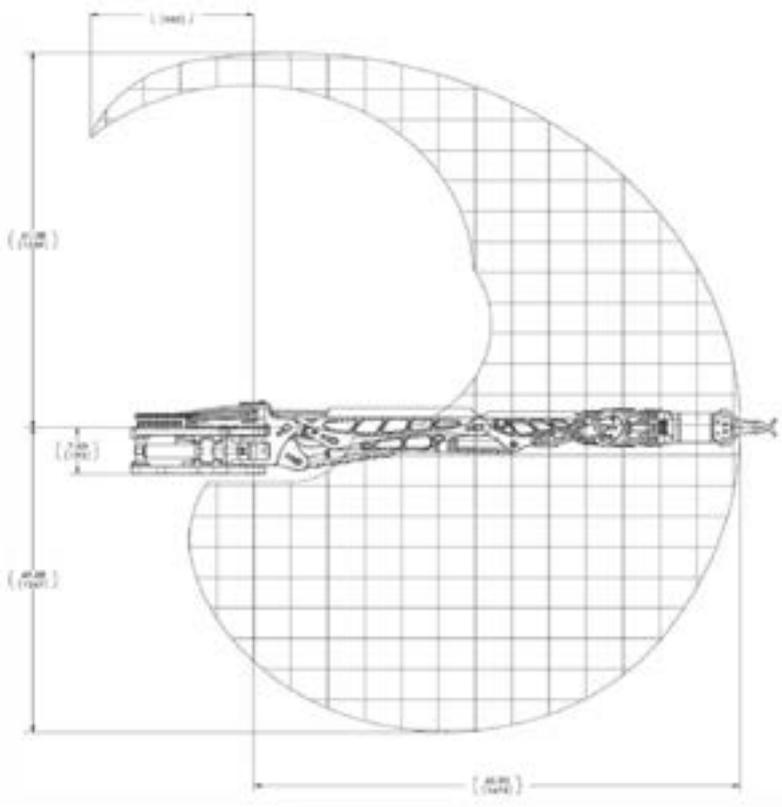

Range of Motion, Top View

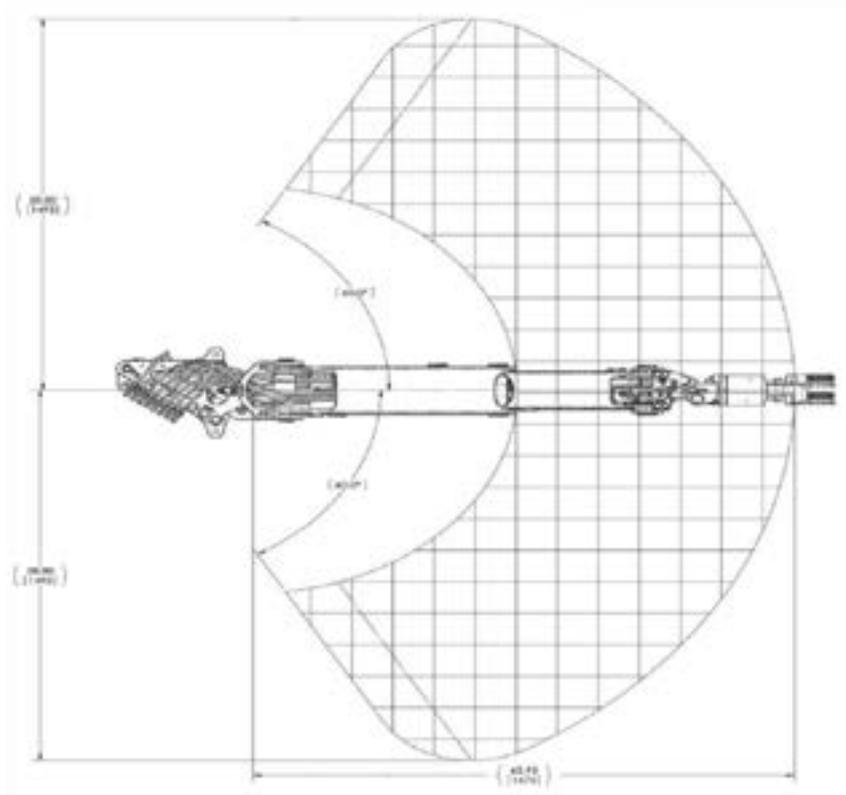

Range of Motion, Top View