# The Subsea Tooling Specialists



### **Key Features:**

- Heavy duty wire rope cutter designed for use in severe working conditions
- Hydraulically operated anvil for easy ROV deployment
- Robust plated steel and stainless steel construction
- All steel components are electroless nickel plated to resist corrosion
- Long blade life ensures that tool maintenance is kept to a minimum
- Optional intensifier panel is available

## Webtool™ RCV155

**Cutters and Grinders** 

The RCV155 is primarily intended for use on steel wire rope, having a maximum tensile strength of 1880N/mm and will cut ropes up to 155mm diameter.

It may be used on alternative materials, such as electrical power or communication cables, again up to a maximum of 155mm diameter. Where smaller diameters are to be cut, effort should be made to place the material centrally along the anvil to minimise any offset loading.









# Webtool™ RCV155

### **Cutters and Grinders**



Specifications		
Dimensions	Height	867mm
	Width	592mm
Weight	Weight in air	240Kg
	Weight in water	208Kg
Hydraulics	Max input pressure (main cylinder)	690 Bar
	Max input pressure (anvil cylinder)	210 Bar
Cutting capacity	Maximum Ø155mm wire rope of 1770N	N/mm² grade

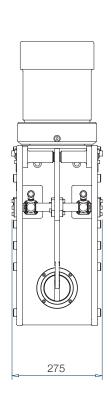

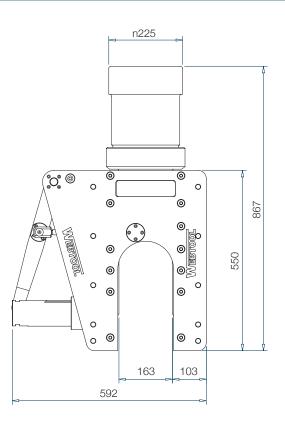

155mm hydraulic cutter Anvil hydraulic hose set
Operating manual
Operating manual
Transit case
Spare blade