


# APOS Survey

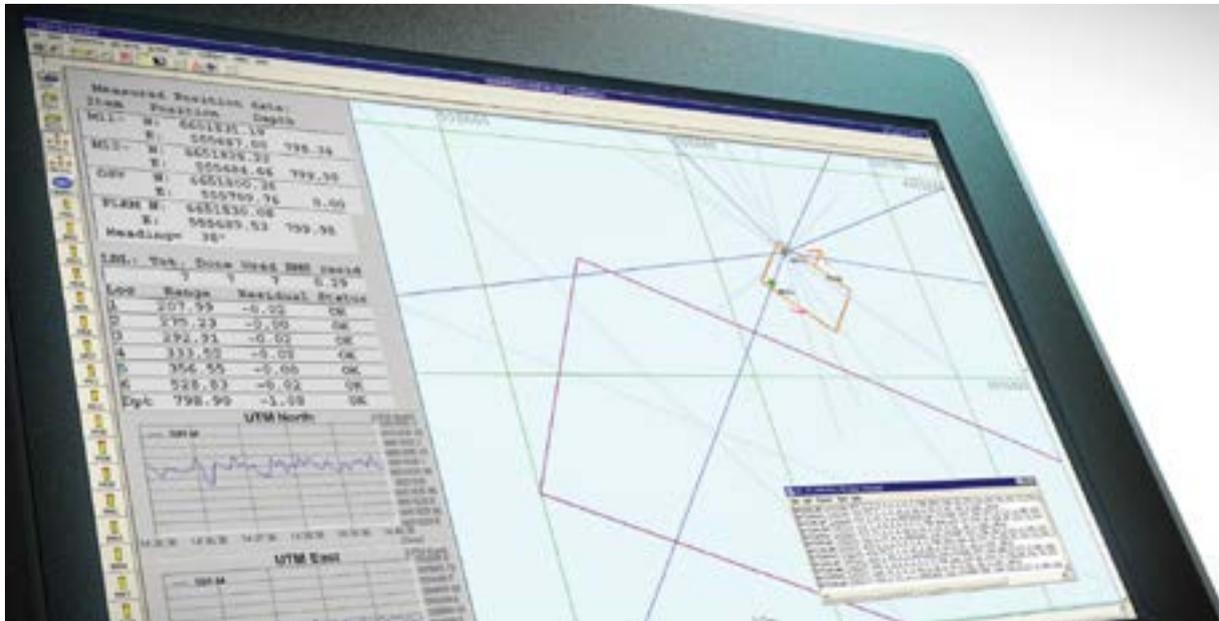

## Features

- APOS Survey OS version 6 or later
- Opto isolated serial interface to the vessel's HiPAP
- Use vessels or local survey sensors GNSS MRU, Gyro
- Cymbal digital acoustics (500+ channels)
- SSBL Alignment and LBL box in calibration
- Select which of the vessels HiPAP transducers are available for survey
- Industry standard and propriety NMEA telegrams
- Positioning modes: SSBL Fast Track, LBL & Sparse LBL
- SSBL Alignment and LBL box in calibration
- Blue Marble Geodetic Library
- Interfaces to Subsea HAIN and CPAP LBL ROV Transceiver
- Interface ROV pressure and sound velocity sensors

## Specifications

<b>Product</b>	APOS Survey
<b>Country of origin</b>	Norway
<b>Manufacturer</b>	Kongsberg Discovery

APOS Survey has been developed to provide a cost effective solution for subsea survey and construction operations, making it possible for the surveyor to utilise a vessel's HiPAP system. Acoustic interrogations are interleaved or run simultaneously with the DP system updates, without making changes to the vessel's APOS software or installation parameters.

APOS Survey offers full LBL and SSBL, quicker mobilisation times and is designed for both permanent and temporary installation on vessels. The software communicates directly with the HiPAP transceiver, enabling the surveyor to operate independently of the bridge. The software safely integrates into the vessels HiPAP system through a high speed, optically-isolated, serial connection to maintain independence from the vessel's Dynamic Positioning (DP) network, and removes restrictions normally associated with operating a HiPAP system for survey purposes.

The surveyor can interface local survey grade sensors, IMU, GYRO and GNSS, set up lever arms and load velocity profiles independently of the vessel, unlocking the full potential of HiPAP. The cPAP LBL transceiver for ROV positioning and portable HiPAP transceivers are easily interfaced, providing flexibility for a full range of operations. Both the vessels APOS and APOS Survey can compute position off the same SSBL transponders with independent calculation. HiPAP transducer alignment for both the vessel and APOS Survey system can be run simultaneously.

### MP8300 Computer

- Type-approved by ABS, BV, CCS, DNV, GL, KR, LR, NKK, PRS and RINA
- Tested against IACS Unified Requirements E10 and IEC 60945
- 8 Port serial card; 4x RS-232 and 4x RS-422/485
- 4 Gigabit Ethernet ports
- 128 GB SSD drive, DVD-RW

### Connecting to vessel's apos computer

- MOXA NPort 54501 Ethernet to Serial Converter
- ASI software driver

### Power

- 110v-240v AC

